

# Instructions for Ceiling Tile Routing Template

Cut openings for Cisco Access Points when using Cisco Flush Mount Kit P/N AIR-AP-BRACKET-3=  
Flush mount any of the following models: » AP1040 Series; » AP1140 Series; » AP3500i Series  
[http://www.cisco.com/en/US/docs/wireless/access\\_point/mounting/guide/bezelmount.html](http://www.cisco.com/en/US/docs/wireless/access_point/mounting/guide/bezelmount.html)

## •SAFETY



- Please read and follow all safety recommendations for any power tools used

## •PACKAGE CONTENTS

- (1) template (4) brackets (8) nuts

## •ASSEMBLY

- one bracket with claw up for holding template

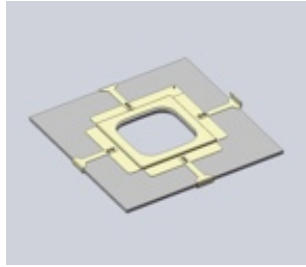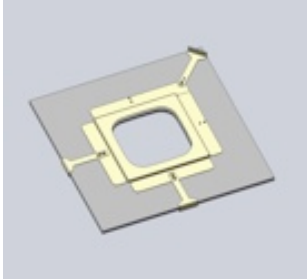


- the other brackets with claw down for positioning template
- attach 3 brackets as shown (4 brackets optional)

## •TOOLS AND EQUIPMENT REQUIRED

- (1) template
- (1) 3/8" or adjustable wrench
- (2) approximately 1-1/2 " spacers for under tile
- (1) router with small diameter bit

## •PROCEDURE

- place spacers on bench or work surface
- place tile on spacers so the opening will be between the spacers
- place template on tile and adjust brackets for center
- adjust router so smooth shank of bit will contact template
- hold template with one hand
- use other hand to route the opening starting inside the template so the bit will not cut the template

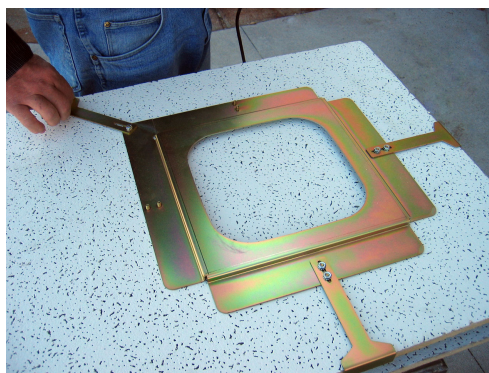

For questions or to order more templates contact:

Dave Neisen at Oakdale Precision Inc.

[dave@oakdaleprecision.com](mailto:dave@oakdaleprecision.com)

[www.oakdaleprecision.com/cisco\\_routing\\_template.html](http://www.oakdaleprecision.com/cisco_routing_template.html)